


CONDUIT LANDING PANEL
16.50x7.13 [419.1x181.0]

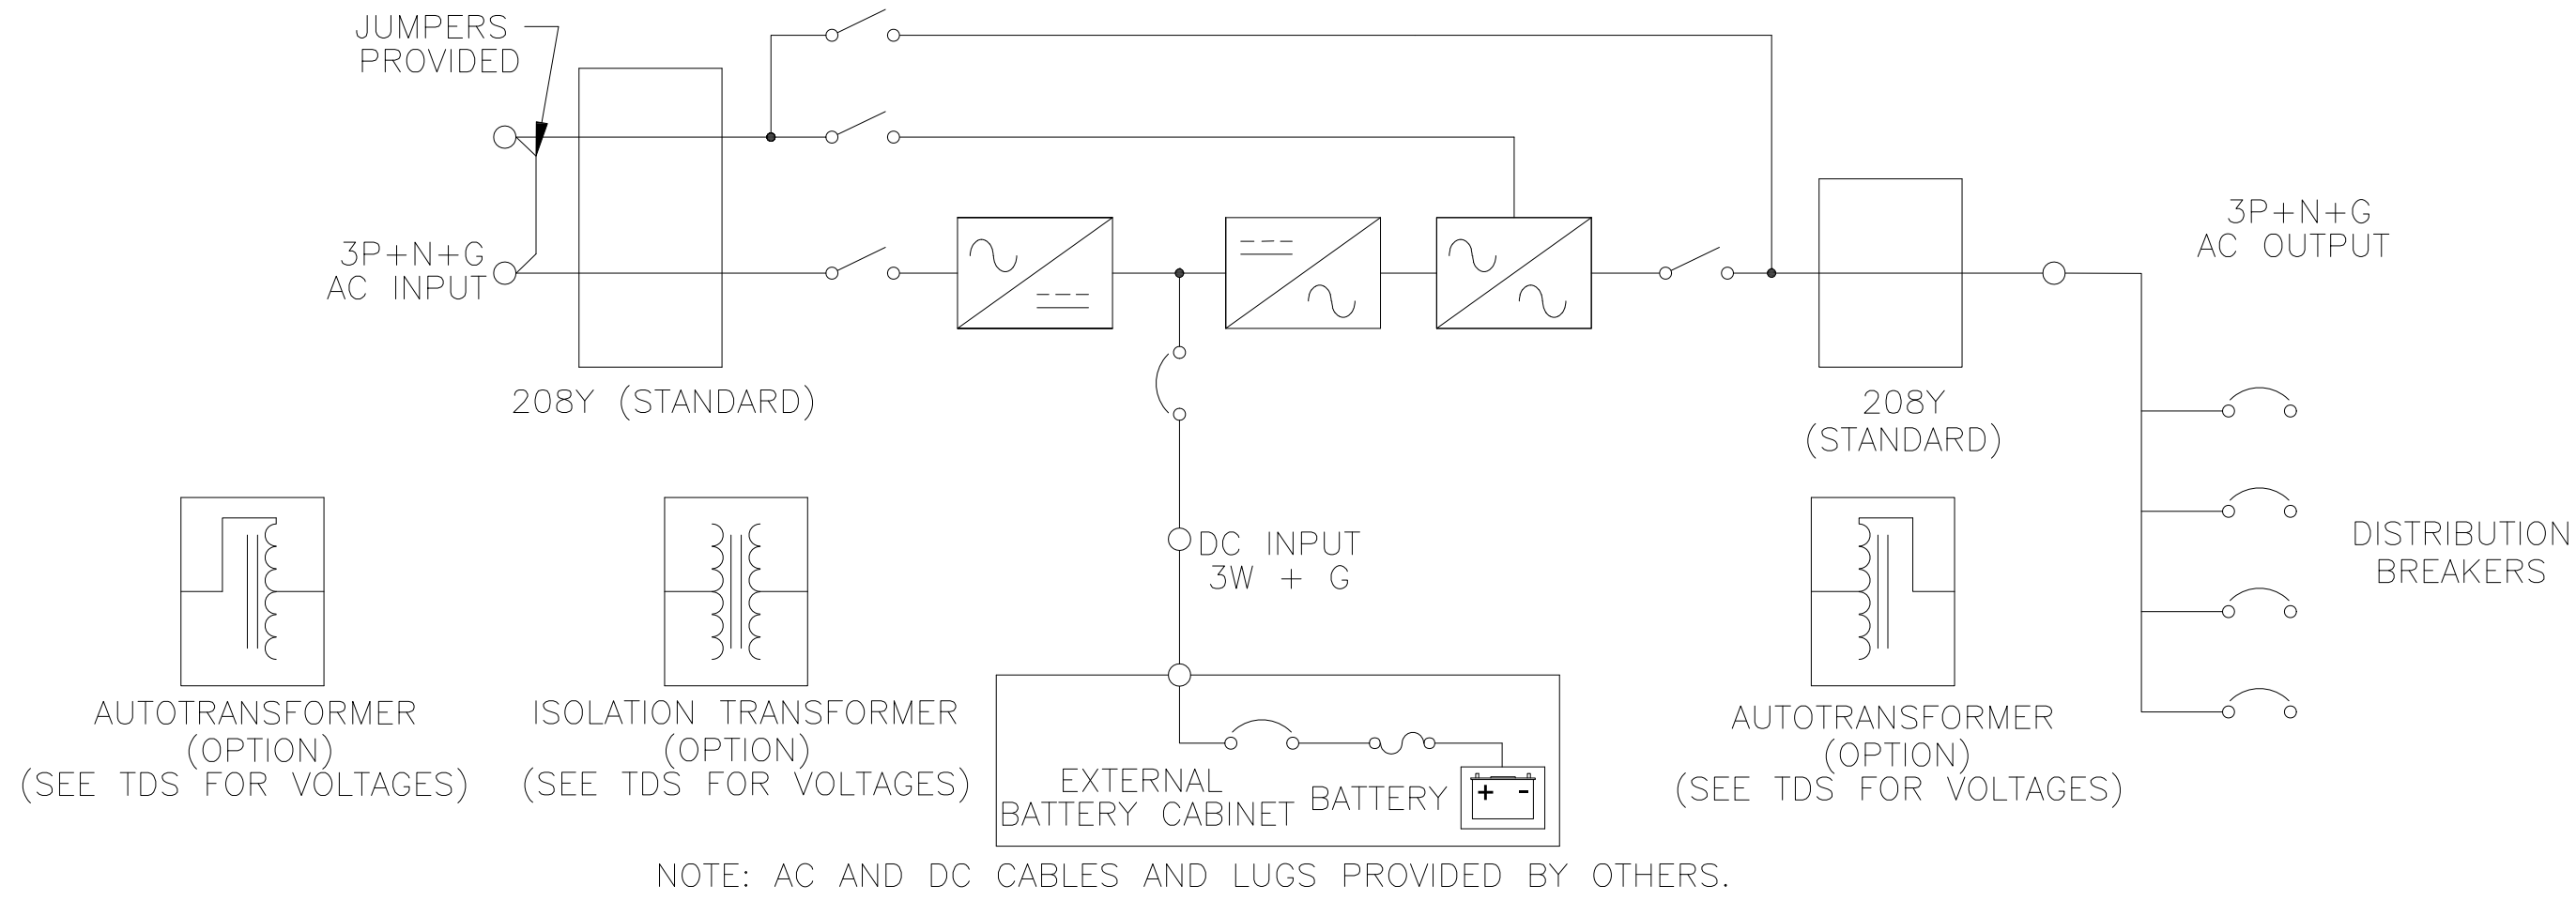

DWG. SIZE D	DWG. NO. 096-6201		
REVISIONS			
SYM.	E.C.O.	DATE	APVD.
A	RELEASED TO PRODUCTION		
B	30141	1/24/25	
UPDATE VIEWS/REAR ENTRY			

RELEASED TO PRODUCTION
30141 | 1/24/25 |
UPDATE VIEWS/REAR ENTRY

TOP REAR VIEW
UPS

VENTILATION
CLEARANCE

CIRCUIT BREAKER
ACCESS BEHIND
DOOR

72.44 [1840.0]

40.50 [1028.8]

32.49 [825.2]

REAR VIEW UPS

LEFT SIDE VIEW
UPS

FRONT VIEW UPS

FRONT VIEW UPS
DOORS REMOVED

ENVIRONMENTAL
OPERATING TEMPERATURE: 0 C TO 40° C
ALTITUDE: 0-3300 FEET [1000 METERS] (WITHOUT
DERATING)
RELATIVE HUMIDITY: 0-95%, NON-CONDENSING

SERVICE/VENTILATION CLEARANCES
FROM TOP OF CABINET: 18.00" [457.2MM]
FROM FRONT OF CABINET: 36.00" [914.4MM]
FROM REAR OF CABINET: 0" [0MM]

UL LISTED TO UL 1778, FILE NO.: E191175
UL LISTED TO UL 924 AND OUST


(OPTIONAL)
OUTPUT DISTRIBUTION
BREAKERS

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS HOLES ANGLES DRAFT .XX .010 .005 1° 1-1/2° XXX .005				UNITS IN [mm]		TITLE: SPEC. CONTROL DRAWING STACO E3 UL 924 3.5 KVA EMERGENCY LIGHTING SYSTEM			
MATERIAL :				ALL DIMENSIONS APPLY AFTER PLATING		DRAWN BY S.FRALEY	DATE 7/22/24	FIRST USED ON	DO NOT SCALE DWG.
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				CHECKER B. FOX		DATE 1/24/25	WEIGHT APPROX.	CAGE CODE 83008	DWG. SIZE D
				ENGINEER B FOX		DATE 1/24/25	SCALE 1/8	SHEET 1 OF 2	DWG. NO. 096-6201

**STACO
ENERGY
PRODUCTS CO.**
A Components Corporation of America Company
2425 Technical Drive Miamisburg, Ohio 45342 USA

8 7 6 5 4 3 2 1

DRY CONTACT
COM PORT TO
RELAY INTERFACE
SNMP CARD
SLOT

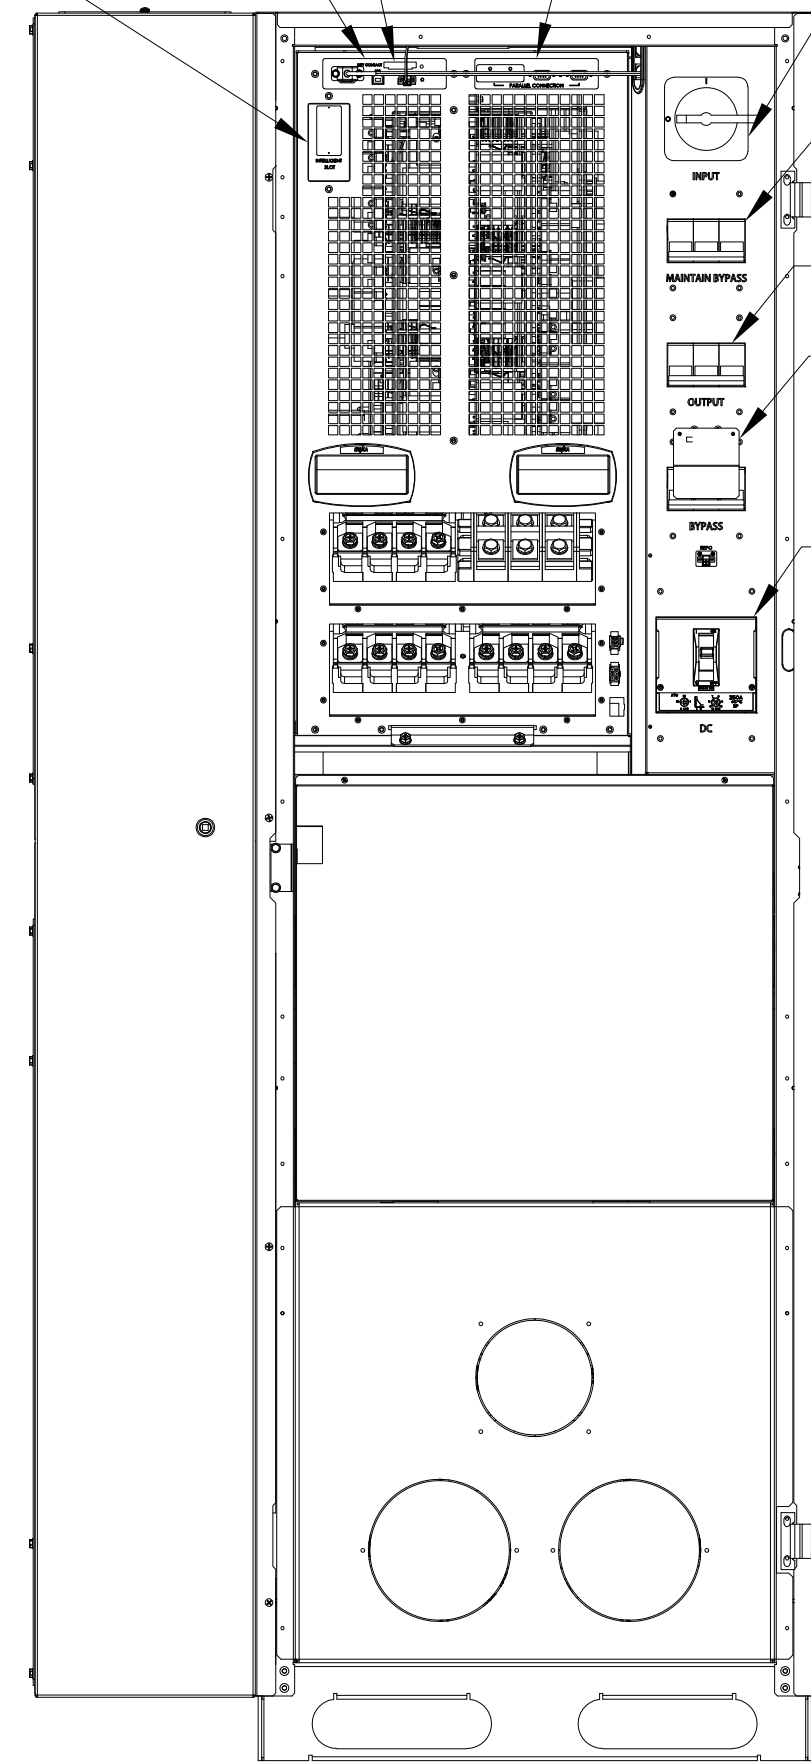

FRONT VIEW UPS
DOOR REMOVED

PARALLELING
CONNECTIONS

INPUT SWITCH

MAINTENANCE BYPASS
BREAKER


OUTPUT BREAKER

STATIC BYPASS
BREAKER

BATTERY BREAKER

STATIC BYPASS
CONNECTIONS

INPUT POWER
CONNECTIONS

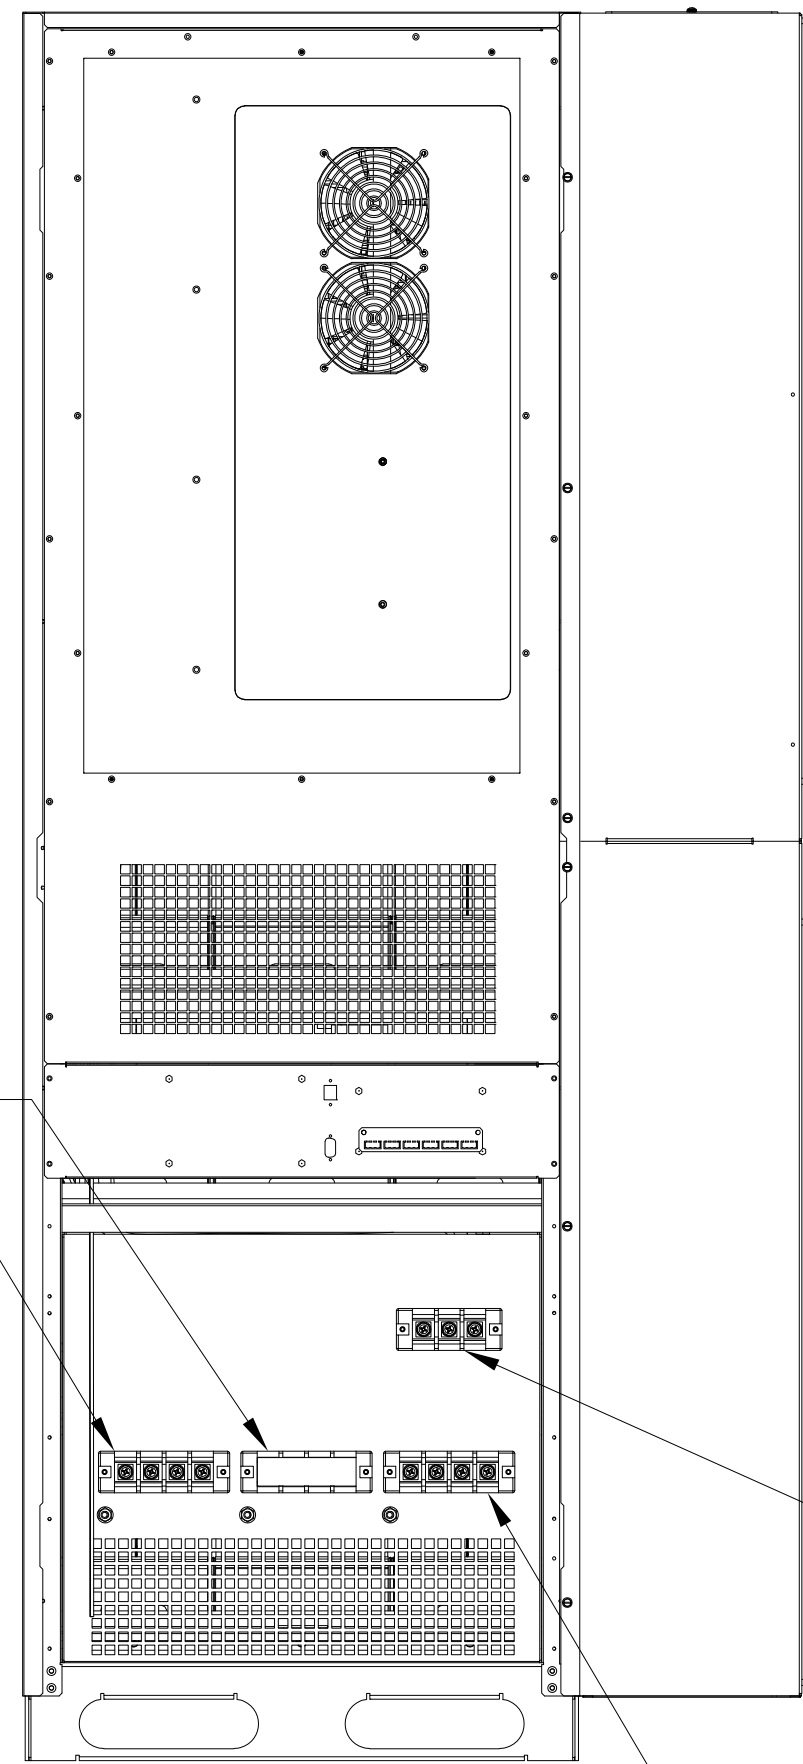


REAR VIEW UPS
REAR PANEL REMOVED

EXTERNAL
BATTERY
CONNECTIONS

OUTPUT POWER
CONNECTIONS

ALARM RELAY
CONNECTIONS
SEE DETAIL

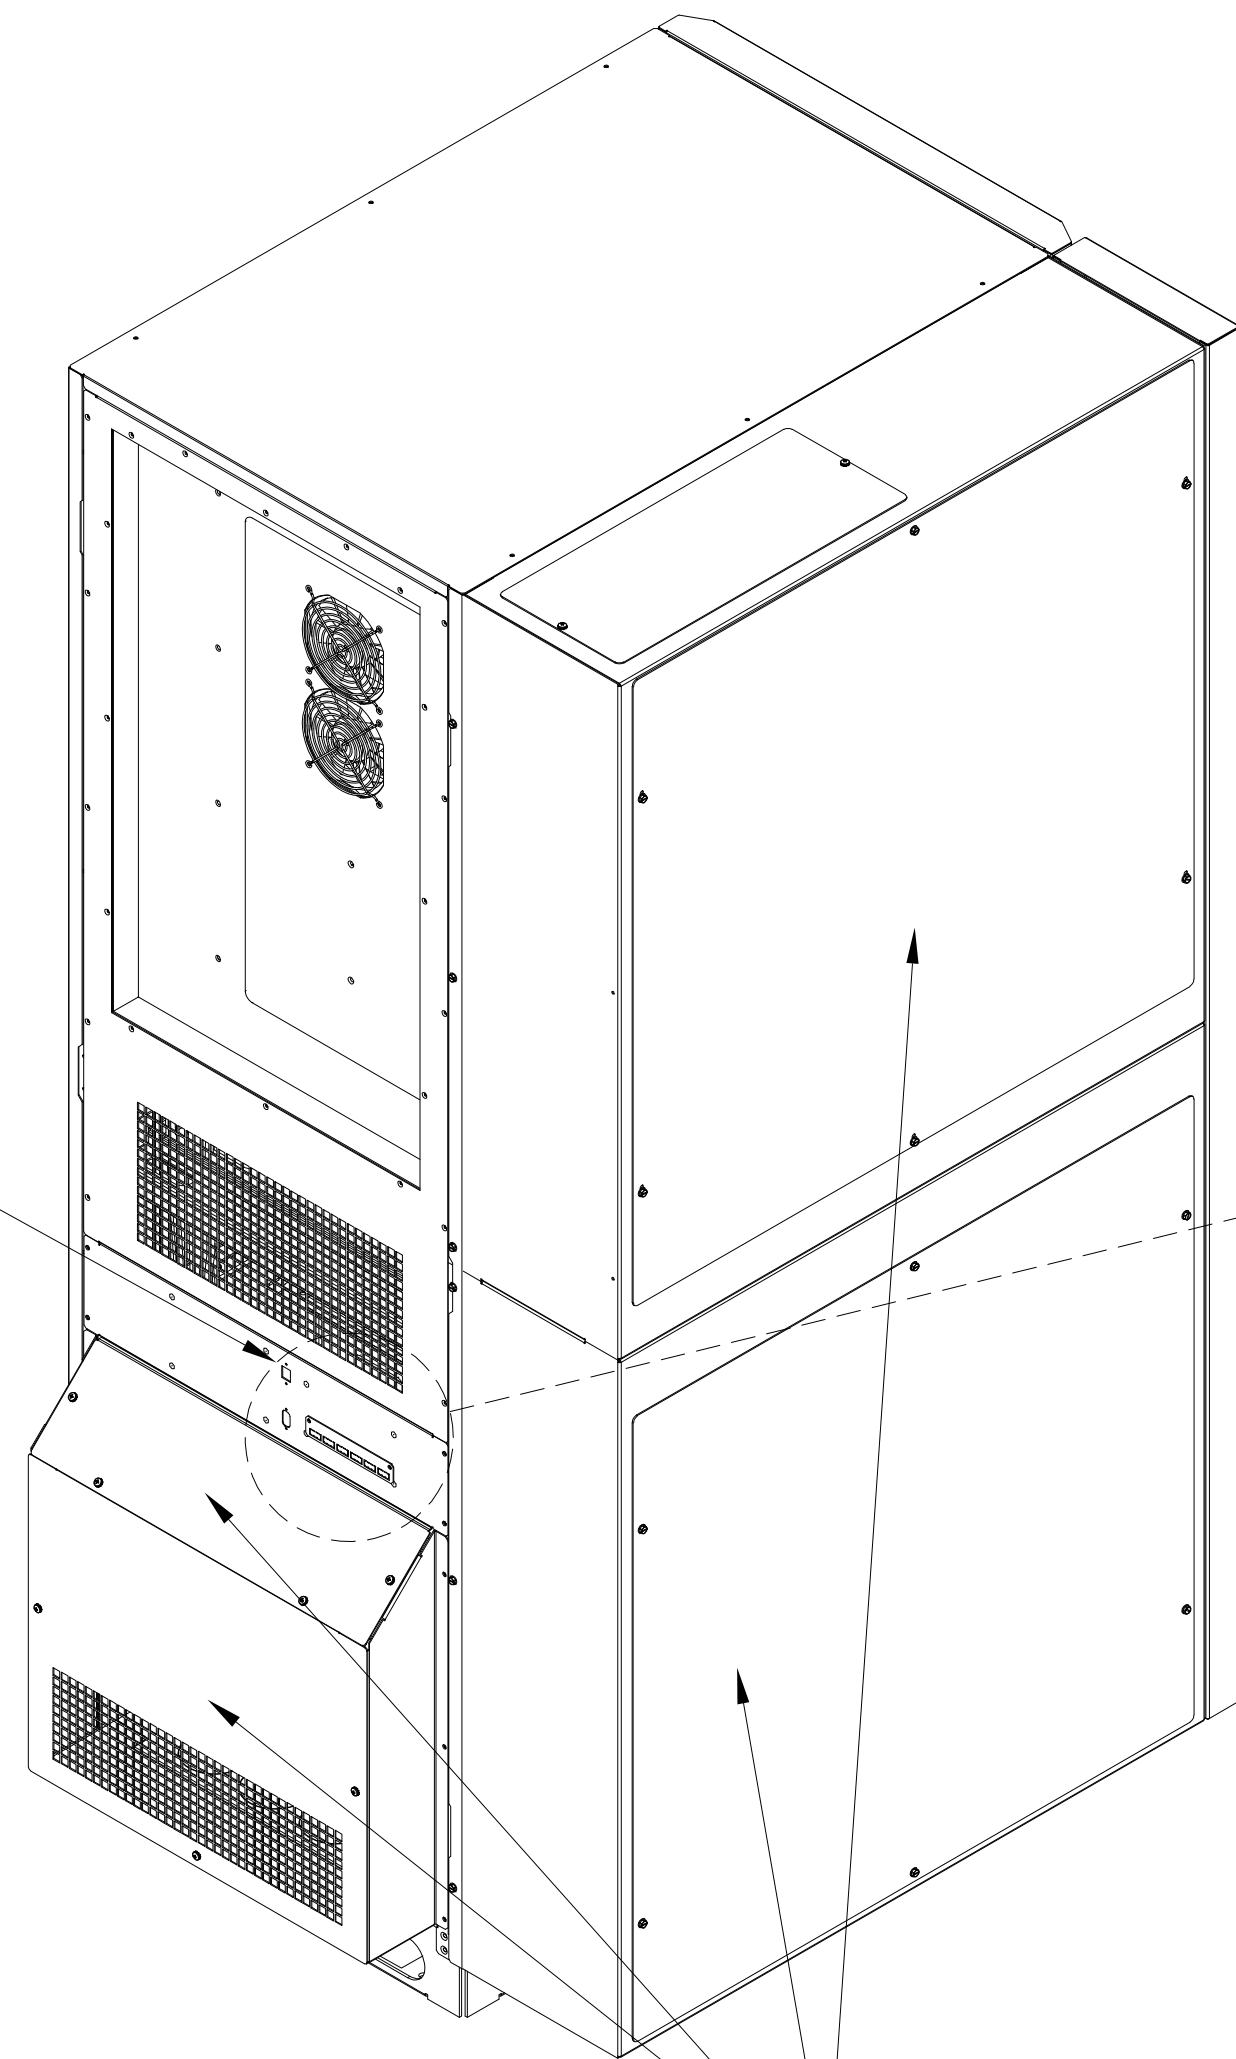

ISO VIEW UPS

REMOVABLE PANELS
FOR CABLE INSTALLATION

ALARM RELAY CONNECTIONS

RJ45 CONNECTOR
FOR FUTURE USE

RS-232 AND RS-485
CONNECTOR (MODBUS)

J2 - NORMAL OPERATION
J3 - ON BYPASS
J4 - ON BATTERY
J5 - LOW BATTERY
J6 - OVER TEMP
J7 -ALARM PRESENT

3.54 [90.0] TYP

6.25 [158.7]

2.33 [59.1]

REAR

BOTTOM ENTRY
CONDUIT KNOCKOUTS

BOTTOM VIEW UPS

FRONT

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS HOLES ANGLES DRAFT .XX .010 .005 1° 1-1/2° XXX .005				UNITS IN [mm]	TITLE: SPEC. CONTROL DRAWING STACO E3 UL 924 3.5 KVA EMERGENCY LIGHTING SYSTEM				 A Components Corporation of America Company 2425 Technical Drive Miamisburg, Ohio 45342 USA								
MATERIAL : The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				ALL DIMENSIONS APPLY AFTER PLATING	DRAWN BY S.FRALEY								DATE 7/23/24	FIRST USED ON	DO NOT SCALE DWG.		
					CHECKER B. FOX								DATE 1/24/25	WEIGHT APPROX.	CAGE CODE 83008	DWG. SIZE	DWG. NO.
					ENGINEER B FOX								DATE 1/24/25	SCALE 1/8	SHEET 2 OF 2	D	096-6201