



DWG. SIZE D	DWG. NO. 096-4411		
REVISIONS			
SYM.	E.C.O.	DATE	APVD.
A	RELEASED TO PRODUCTION		
B	30324	1/28/26	
	ADDED DIMS FOR WALL MOUNT		


RELEASED TO PRODUCTION
30324 | 1/28/26 |
ADDED DIMS FOR WALL MOUNT

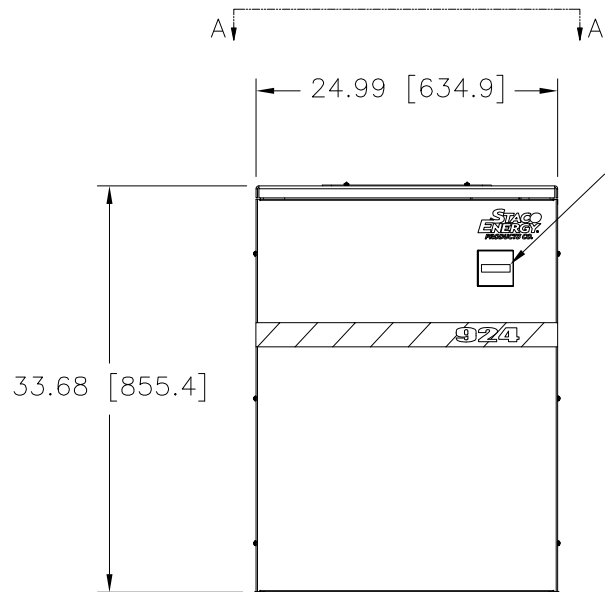



FRONT VIEW

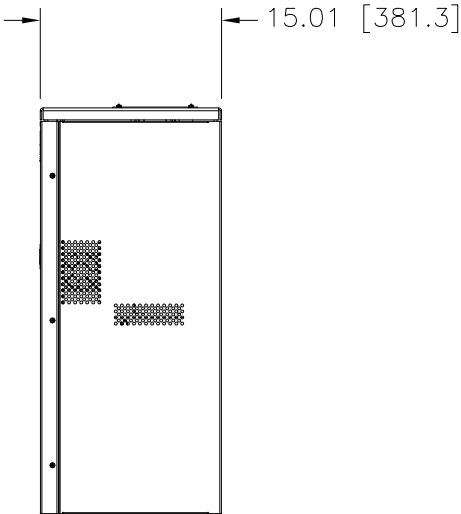

RIGHT SIDE
VIEW

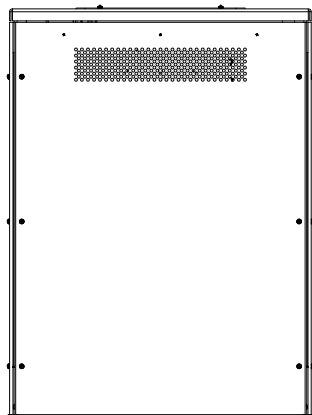


REAR VIEW

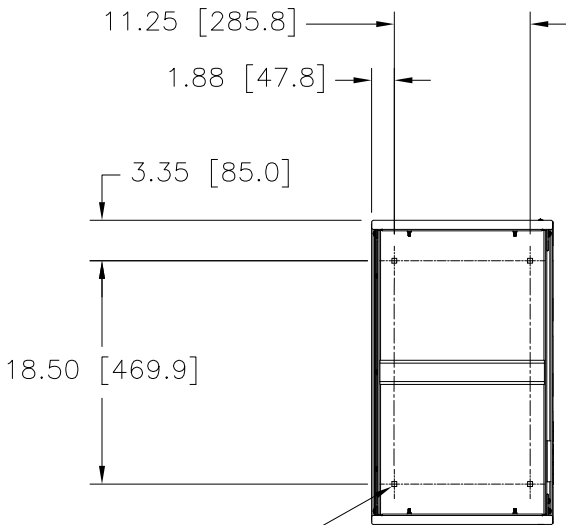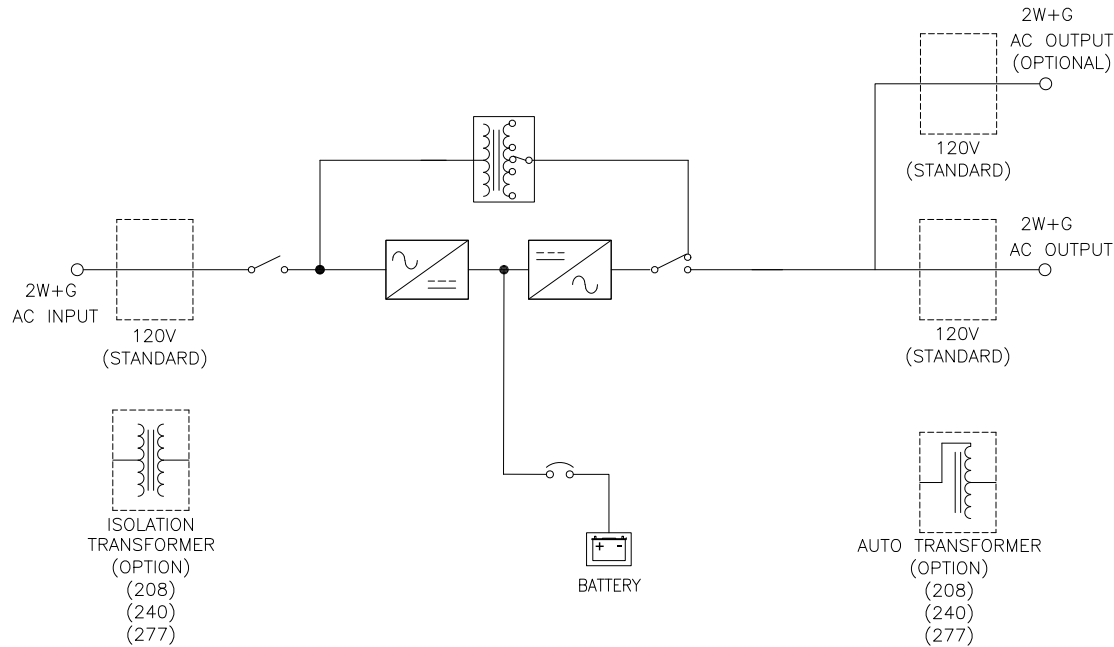

4X - .41 [10.3] X .41 [10.3]
SQUARE HOLES

BOTTOM VIEW

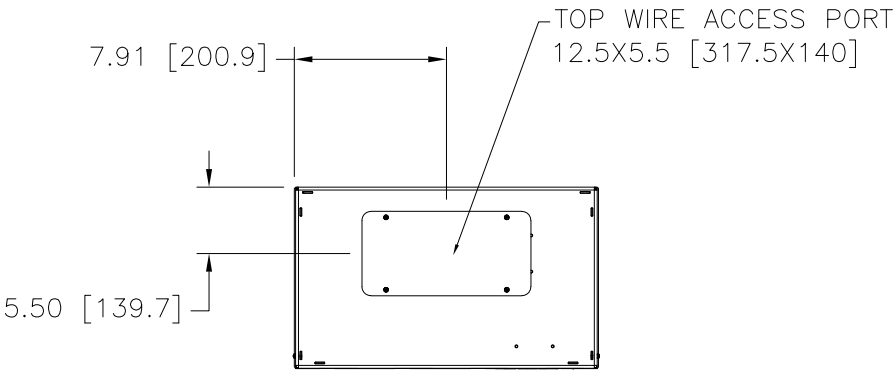

VIEW A-A TOP
OF UNIT

ENVIRONMENTAL
OPERATING TEMPERATURE: 0°C TO 40°C
ALTITUDE: 0-3300 FEET [1000 METERS]
(WITHOUT DERATING)

RELATIVE HUMIDITY: 0-95%, NON-CONDENSING

SERVICE/VENTILATION CLEARANCES
FROM FRONT OF CABINET: 36.00 [914.4]
FROM REAR OF CABINET: 2.00 [50.8]


UL LISTED TO UL924/OUST AND UL 1778, FILE NO.:E191175

AVAILABLE OPTIONS:

OCB - OUTPUT CIRCUIT BREAKERS, MAXIMUM 6 POLES.

COMMUNICATION CARDS - SNMP, MODBUS, BACNET, DRY
CONTACTS AND ENVIRONMENTAL KIT.

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX .010 .XXX .005				UNITS IN [mm]		TITLE: SPEC. CONTROL DRAWING - SEL 924-.675-1.35KW EMERGENCY LIGHTING SYSTEM				 A Components Corporation of America Company 2425 Technical Drive, Marietta, Ohio 45754 USA	
MATERIAL:				ALL DIMENSIONS APPLY AFTER PLATING		DRAWN BY S.FRALEY	DATE 9/8/25	FIRST USED ON SEL	DO NOT SCALE DWG.		
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.						CHECKER	DATE	WEIGHT APPROX.	CAGE CODE 83008	DWG. SIZE D	DWG. NO. 096-4411
						ENGINEER	DATE	SCALE 1/8	SHEET 1 OF 2		

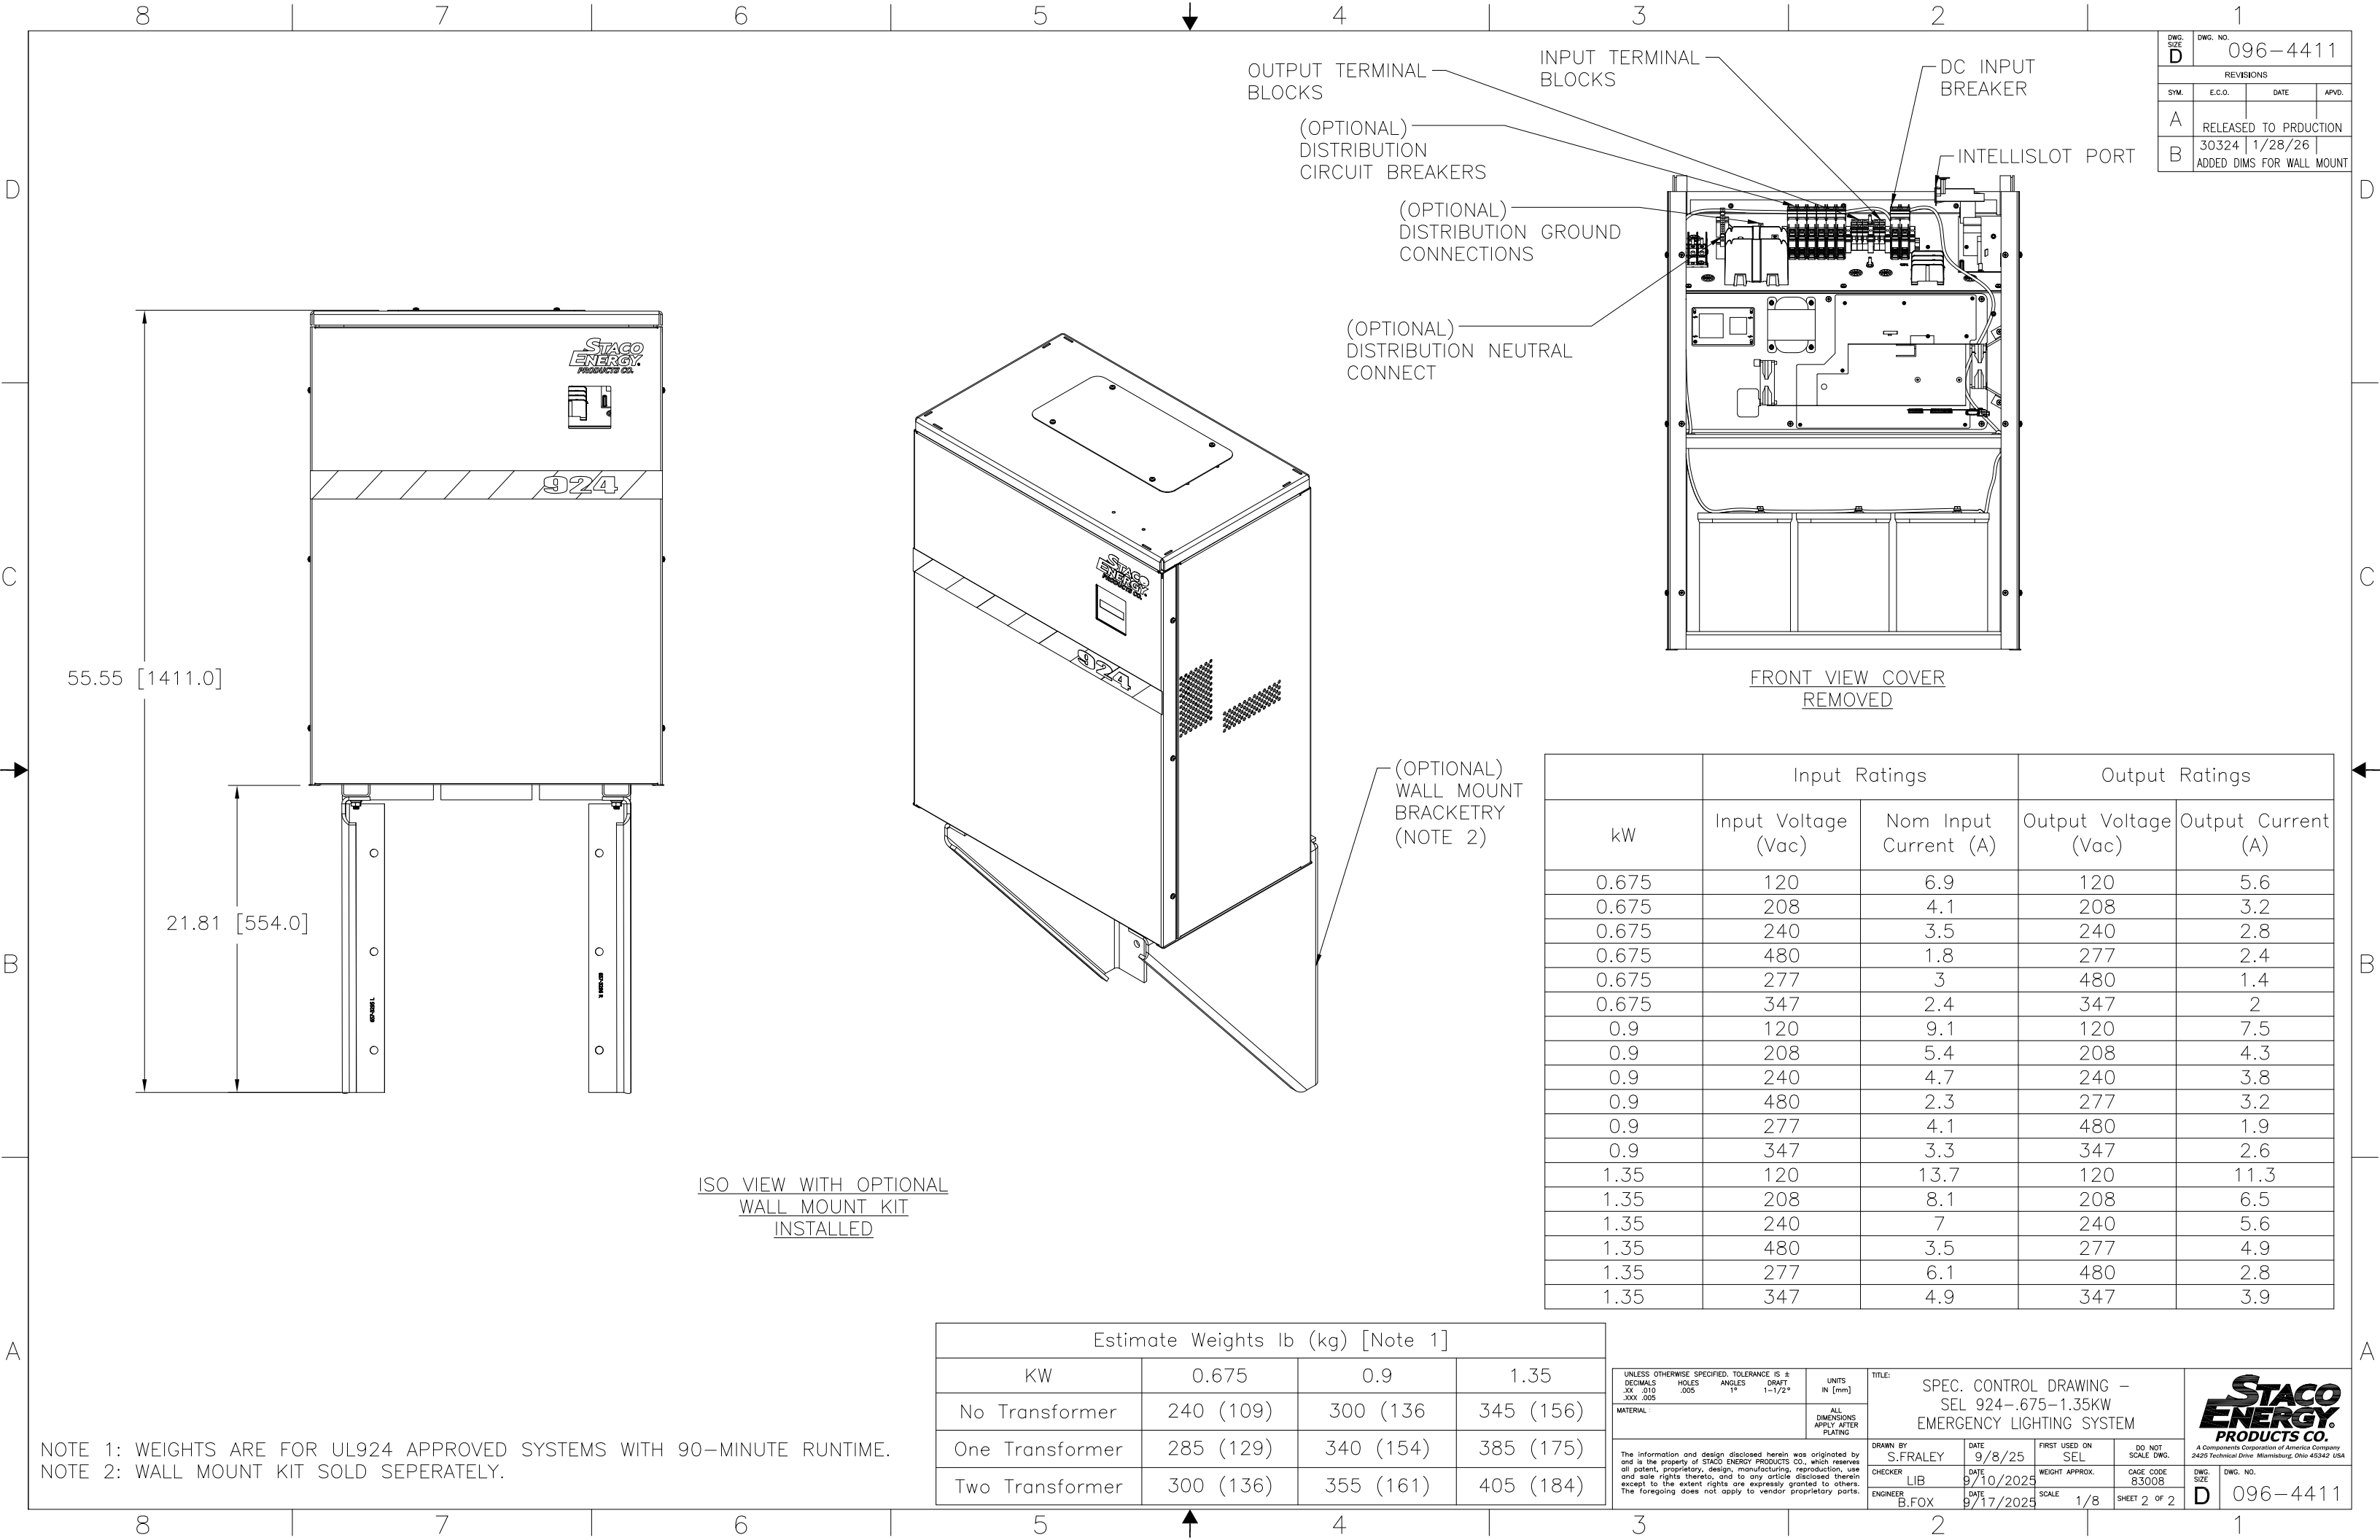

DWG. NO.	096-4411		
SYM.	E.C.O.	DATE	APVD.
A	RELEASED TO PRODUCTION		
B	30324 1/28/26 ADDED DIMS FOR WALL MOUNT		

kW	Input Ratings		Output Ratings	
	Input Voltage (Vac)	Nom Input Current (A)	Output Voltage (Vac)	Output Current (A)
0.675	120	6.9	120	5.6
0.675	208	4.1	208	3.2
0.675	240	3.5	240	2.8
0.675	480	1.8	277	2.4
0.675	277	3	480	1.4
0.675	347	2.4	347	2
0.9	120	9.1	120	7.5
0.9	208	5.4	208	4.3
0.9	240	4.7	240	3.8
0.9	480	2.3	277	3.2
0.9	277	4.1	480	1.9
0.9	347	3.3	347	2.6
1.35	120	13.7	120	11.3
1.35	208	8.1	208	6.5
1.35	240	7	240	5.6
1.35	480	3.5	277	4.9
1.35	277	6.1	480	2.8
1.35	347	4.9	347	3.9

Estimate Weights lb (kg) [Note 1]			
KW	0.675	0.9	1.35
No Transformer	240 (109)	300 (136)	345 (156)
One Transformer	285 (129)	340 (154)	385 (175)
Two Transformer	300 (136)	355 (161)	405 (184)

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX .010 HOLES .205 ANGLES 1° DRAFT 1-1/2° MATERIAL: XXX .005		UNITS IN [mm]	TITLE: SPEC. CONTROL DRAWING – SEL 924-.675-1.35KW EMERGENCY LIGHTING SYSTEM			
ALL DIMENSIONS APPLY AFTER PLATING			DRAWN BY S.FRALEY	DATE 9/8/25	FIRST USED ON SEL	DO NOT SCALE DWG.
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			CHECKER LIB	DATE 9/10/2025	WEIGHT APPROX.	CAGE CODE 83008
			ENGINEER B.FOX	DATE 9/17/2025	SCALE 1/8	SHEET 2 OF 2
			DWG. NO. 096-4411			



A Consortiums Division of America Company
2425 Technical Drive Miami, Ohio 45342 USA



NOTE 1: WEIGHTS ARE FOR UL924 APPROVED SYSTEMS WITH 90-MINUTE RUNTIME.
NOTE 2: WALL MOUNT KIT SOLD SEPERATELY.