




DWG. NO.	096-4412		
REVISIONS			
SYM.	E.C.O.	DATE	APVD.
A	RELEASED TO PRODUCTION		

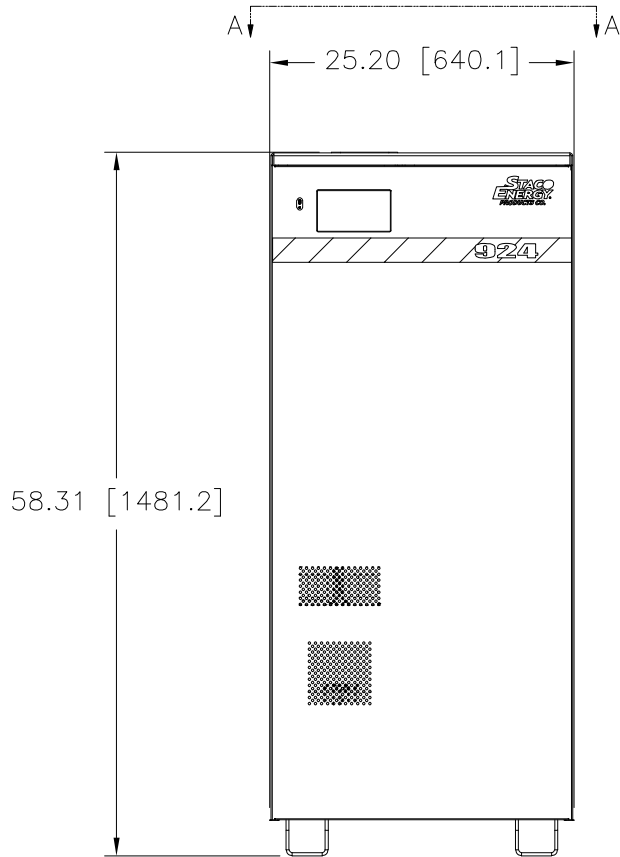


FRONT VIEW

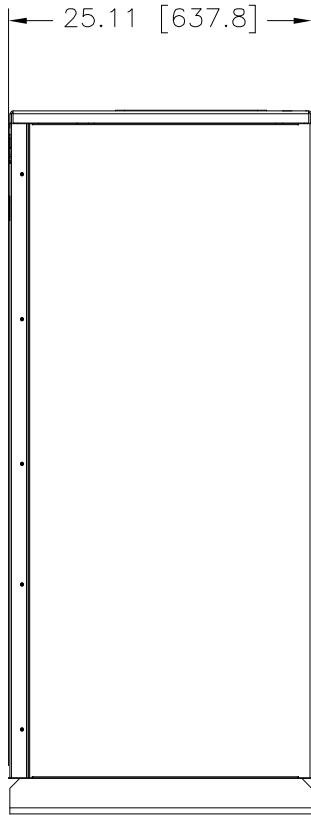

RIGHT SIDE
VIEW

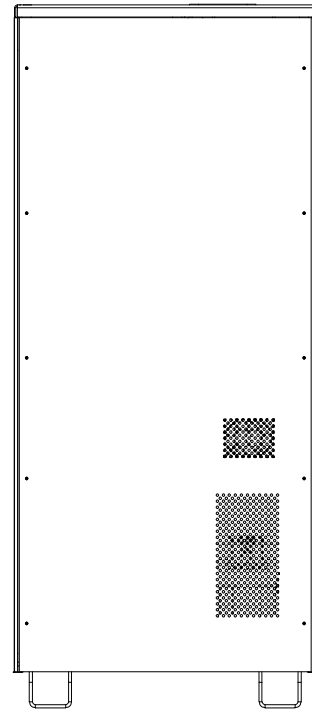

REAR VIEW

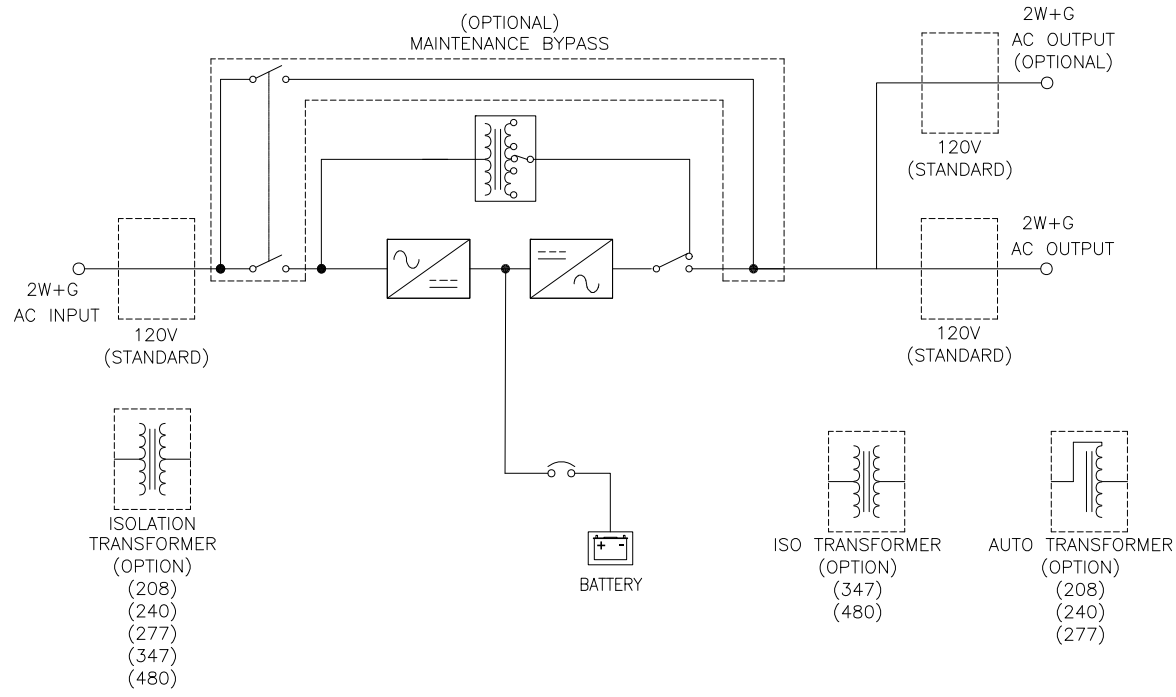

ENVIRONMENTAL
OPERATING TEMPERATURE: 0°C TO 40°C
ALTITUDE: 0-3300 FEET [1000 METERS] (WITHOUT DERATING)

RELATIVE HUMIDITY: 0-95%, NON-CONDENSING

SERVICE/VENTILATION CLEARANCES
FROM FRONT OF CABINET: 36.00 [914.4]
FROM REAR OF CABINET: 8.00 [203.2]

UL LISTED TO UL924 and UL 1778, FILE NO.:E191175

AVAILABLE OPTIONS:

DUAL OUTPUT VOLTAGES - SEE TABLE ON PAGE 2.


N.O. - NORMALLY OFF RELAY TIMER TO SET DELAY OF 0 SECONDS TO 500 HOURS

OCB - OUTPUT CIRCUIT BREAKERS, MAXIMUM 10 POLES.


MCB - MAINTENANCE BYPASS.

COMMUNICATION CARDS - SNMP, MODBUS, BACNET, DRY CONTACTS AND ENVIRONMENTAL KIT.

4X Ø.50 [Ø12.7] THRU FOR 3/8 HARDWARE

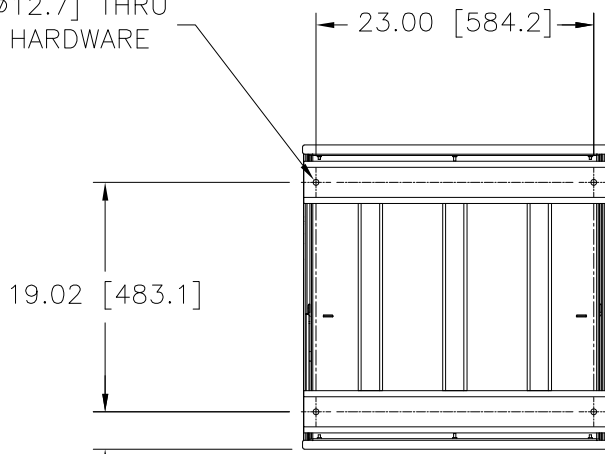


BOTTOM VIEW

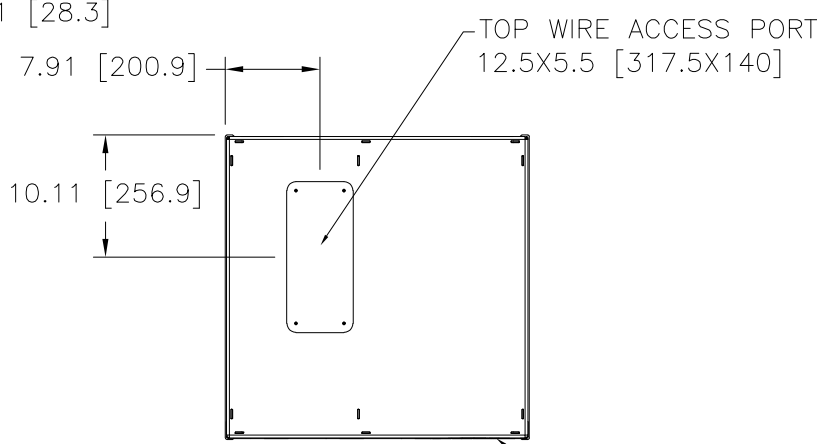

VIEW A-A TOP
OF UNIT

FRONT

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX .010 HOLES .005 ANGLES 1° DRAFT 1-1/2°				UNITS IN [mm]		TITLE: SPEC. CONTROL DRAWING - SEL 924 .675 - 2.7 kW EMERGENCY LIGHTING SYSTEM				 A Components Corporation of America Company 2425 Technical Drive, Marietta, Ohio 45742 USA	
MATERIAL:				ALL DIMENSIONS APPLY AFTER PLATING		DRAWN BY S.FRALEY	DATE 11/25/24	FIRST USED ON	DO NOT SCALE DWG.		
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.						CHECKER B.FOX	DATE 3/25/25	WEIGHT APPROX.	CAGE CODE 83008	DWG. NO. 096-4412	D
						ENGINEER B.FOX	DATE 3/24/25	SCALE 1/8	SHEET 1 OF 2		

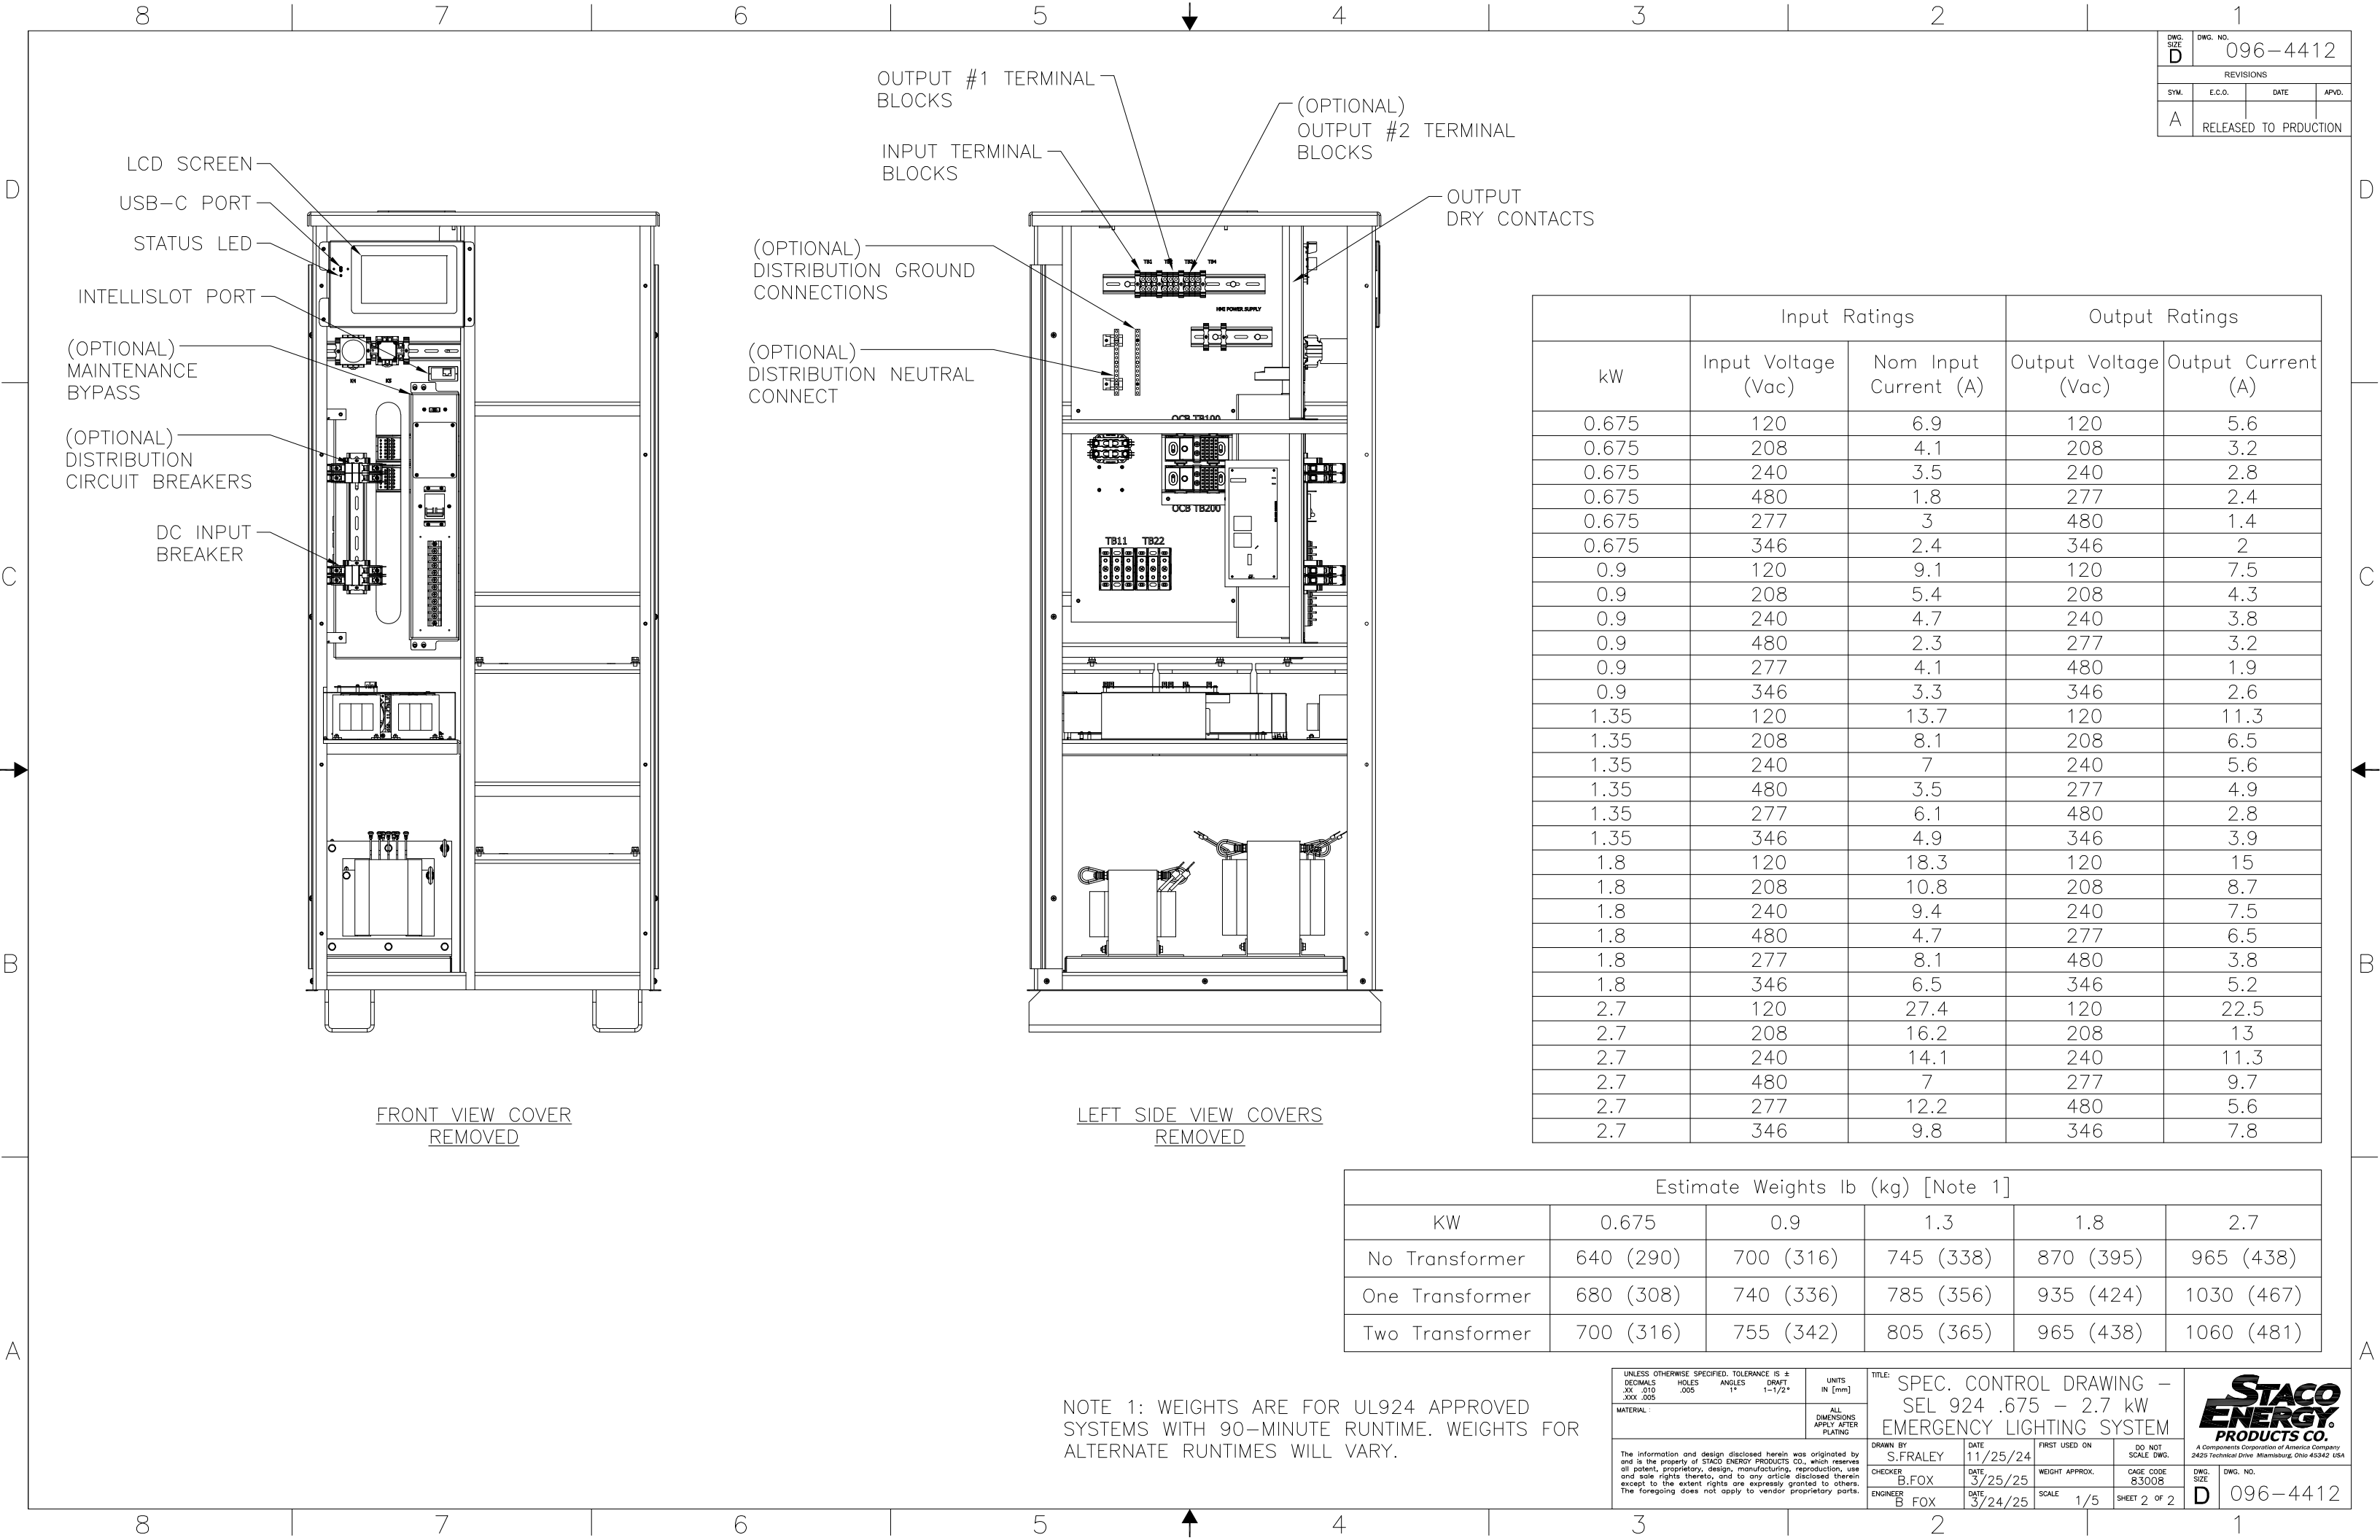

DWG. SIZE D	DWG. NO. 096-4412		
REVISIONS			
SYM.	E.C.O.	DATE	APVD.
A	RELEASED TO PRODUCTION		

kW	Input Ratings		Output Ratings	
	Input Voltage (Vac)	Nom Input Current (A)	Output Voltage (Vac)	Output Current (A)
0.675	120	6.9	120	5.6
0.675	208	4.1	208	3.2
0.675	240	3.5	240	2.8
0.675	480	1.8	277	2.4
0.675	277	3	480	1.4
0.675	346	2.4	346	2
0.9	120	9.1	120	7.5
0.9	208	5.4	208	4.3
0.9	240	4.7	240	3.8
0.9	480	2.3	277	3.2
0.9	277	4.1	480	1.9
0.9	346	3.3	346	2.6
1.35	120	13.7	120	11.3
1.35	208	8.1	208	6.5
1.35	240	7	240	5.6
1.35	480	3.5	277	4.9
1.35	277	6.1	480	2.8
1.35	346	4.9	346	3.9
1.8	120	18.3	120	15
1.8	208	10.8	208	8.7
1.8	240	9.4	240	7.5
1.8	480	4.7	277	6.5
1.8	277	8.1	480	3.8
1.8	346	6.5	346	5.2
2.7	120	27.4	120	22.5
2.7	208	16.2	208	13
2.7	240	14.1	240	11.3
2.7	480	7	277	9.7
2.7	277	12.2	480	5.6
2.7	346	9.8	346	7.8

Estimate Weights lb (kg) [Note 1]					
KW	0.675	0.9	1.3	1.8	2.7
No Transformer	640 (290)	700 (316)	745 (338)	870 (395)	965 (438)
One Transformer	680 (308)	740 (336)	785 (356)	935 (424)	1030 (467)
Two Transformer	700 (316)	755 (342)	805 (365)	965 (438)	1060 (481)

NOTE 1: WEIGHTS ARE FOR UL924 APPROVED SYSTEMS WITH 90-MINUTE RUNTIME. WEIGHTS FOR ALTERNATE RUNTIMES WILL VARY.

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±
DECIMALS HOLES ANGLES DRAFT
.XX .010 .005 1° 1-1/2°
MATERIAL:
ALL DIMENSIONS APPLY AFTER PLATING

TITLE: SPEC. CONTROL DRAWING –
SEL 924 .675 – 2.7 kW
EMERGENCY LIGHTING SYSTEM

DRAWN BY: S.FRALEY
CHECKER: B.FOX
ENGINEER: B.FOX

DATE: 11/25/24
DATE: 3/25/25
DATE: 3/24/25

FIRST USED ON:
WEIGHT APPROX.:
SCALE: 1/5

DO NOT SCALE DWG.
CAGE CODE: 83008
SHEET 2 OF 2

STACO ENERGY PRODUCTS CO.

A Components Corporation of America Company
2425 Technical Drive Miamisburg, Ohio 45342 USA

DWG. NO. 096-4412