




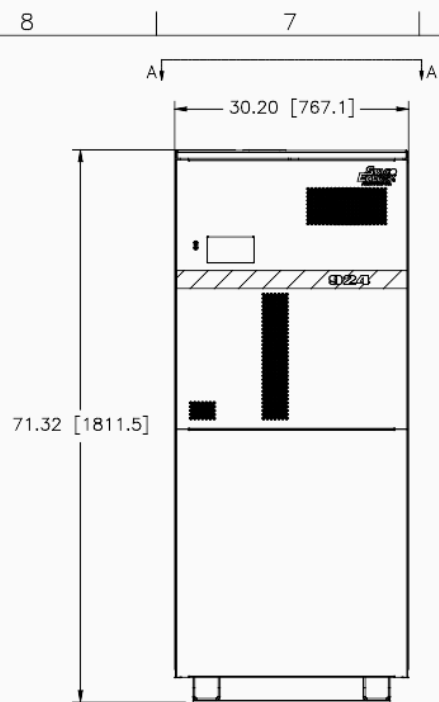


FRONT VIEW

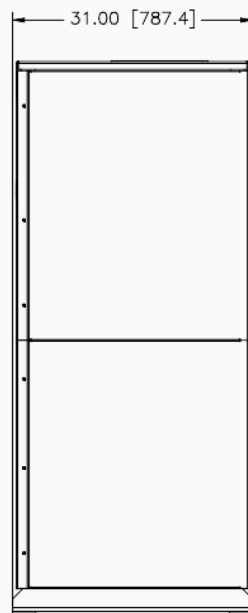


RIGHT SIDE
VIEW

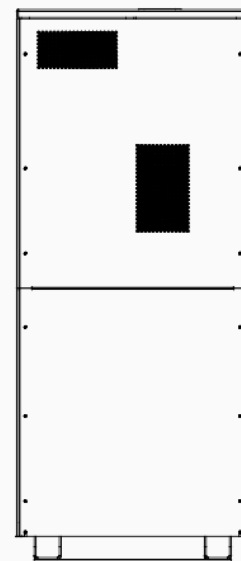

REAR VIEW

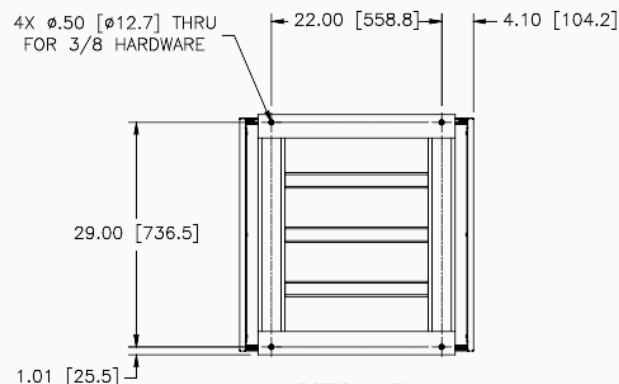


BOTTOM VIEW

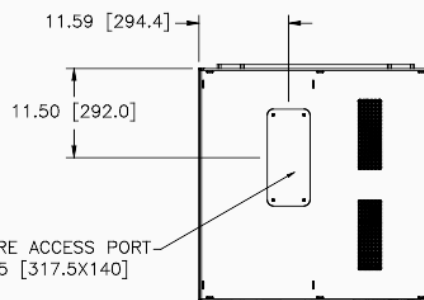

FRONT

VIEW A-A TOP
OF UNIT

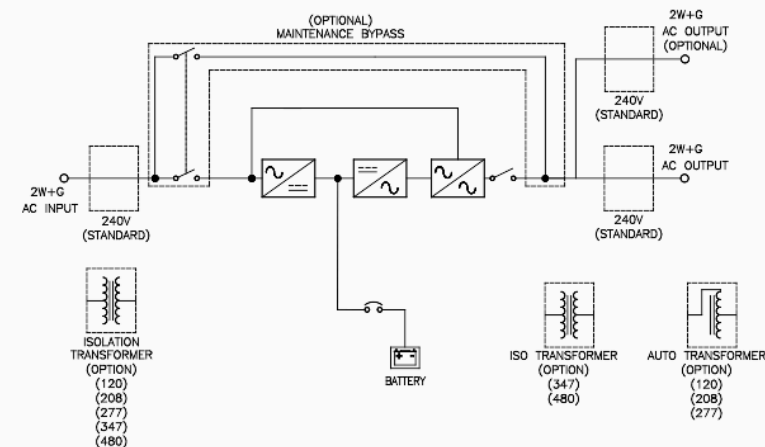

ENVIRONMENTAL

ENVIRONMENTAL:
OPERATING TEMPERATURE: 0°C TO 40°C
ALTITUDE: 0-3300 FEET [1000 METERS]
(WITHOUT DERATING)

RELATIVE HUMIDITY: 0-95%, NON-CONDENSING

SERVICE/VENTILATION CLEARANCES

FROM FRONT OF CABINET: 36.00 [914.4]
FROM REAR OF CABINET: 8.00 [203.2]

UL LISTED TO UL924/OUST and UL 1778, FILE NO.:E191175

AVAILABLE OPTIONS:

DUAL OUTPUT VOLTAGES — SEE TABLE ON PAGE 2.

N.O. - NORMALLY OFF RELAY TIMER TO SET DELAY OF 0 SECONDS TO 500 HOURS

OCB – OUTPUT CIRCUIT BREAKERS, MAXIMUM 10 POLES.

MCB – MAINTENANCE BYPASS.

COMMUNICATION CARDS - SNMP, MODBUS, BACNET, DRY CONTACTS AND ENVIRONMENTAL KIT.

UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE: DIMENSIONS: FRACTIONS DECIMALS ANGLES DEGREES 1/32" 0.0015 0.0005 1/16"		VIEWS: 14 (NONE)		TITLE: SPEC. CONTROL DRAWING - SEL 924 4.2 - 10 kW EMERGENCY LIGHTING SYSTEM			
NOTING: 1		APPROVED: ALL DIMENSIONS APPLY UNLESS OTHERWISE SPECIFIED		DRAWN BY: S. FRALEY		DATE: 11/25/24	
The information and design contained herein are unclassified by the U.S. and are the property of STACO ENERGY PRODUCTS CO. and are loaned to you for your use only. No part of this drawing may be reproduced, stored in a retrieval system, or used in any form, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without prior written permission of STACO ENERGY PRODUCTS CO. The foregoing does not apply to vendor proprietary parts.		CHECKED BY: B. FOX		DATE: 5/13/2025		FIRST USED ON: DO NOT REUSE DATE:	
		ENGINEER: EDX		DATE: 5/13/2025		REUSE APPROVED: DATE: 5/20/25	
		SCALE: 1/8" = 1'		SHEET: 1 OF 2		DWG. NO.: 096-4413	

