


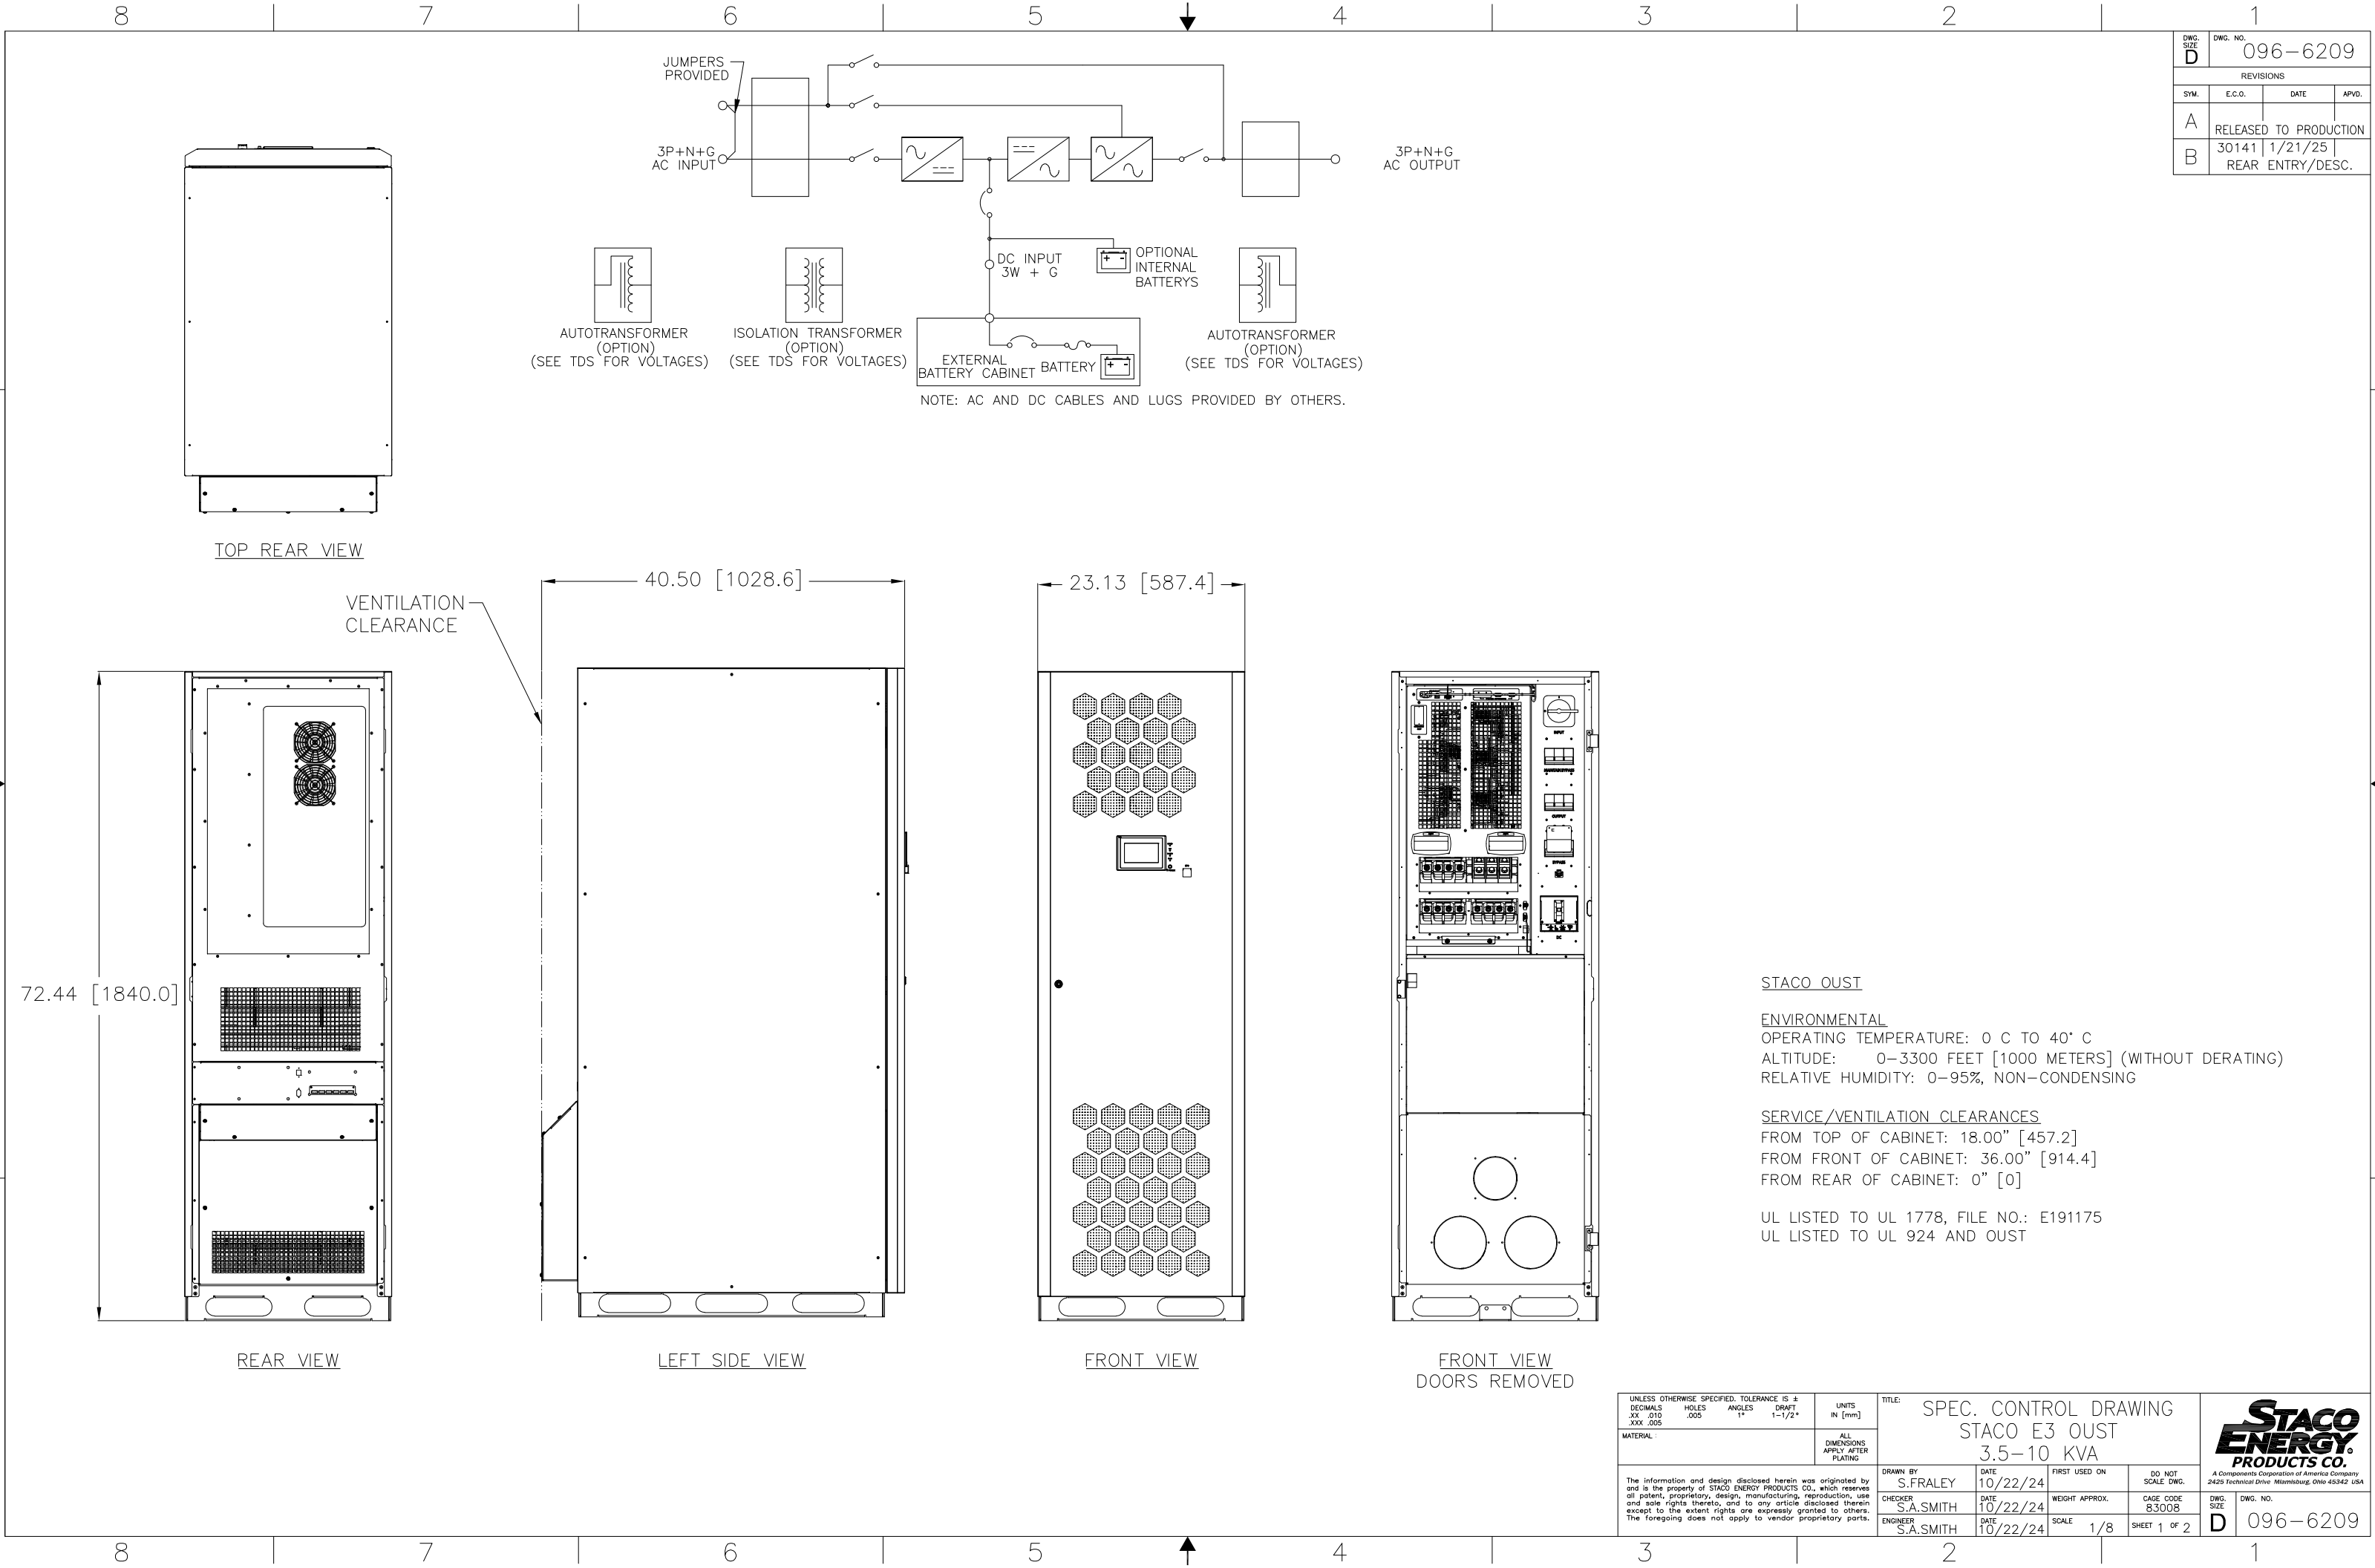

DWG. NO.	096-6209		
REVISIONS			
SYM.	E.C.O.	DATE	APVD.
A	RELEASED TO PRODUCTION		
B	30141	1/21/25	REAR ENTRY/DESC.

STACO OUST

ENVIRONMENTAL
OPERATING TEMPERATURE: 0 C TO 40° C
ALTITUDE: 0-3300 FEET [1000 METERS] (WITHOUT DERATING)
RELATIVE HUMIDITY: 0-95%, NON-CONDENSING


SERVICE/VENTILATION CLEARANCES
FROM TOP OF CABINET: 18.00" [457.2]
FROM FRONT OF CABINET: 36.00" [914.4]
FROM REAR OF CABINET: 0" [0]

UL LISTED TO UL 1778, FILE NO.: E191175
UL LISTED TO UL 924 AND OUST

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS HOLES ANGLES DRAFT .XX .010 .005 1° 1-1/2° MATERIAL : ALL DIMENSIONS APPLY AFTER PLATING				TITLE: SPEC. CONTROL DRAWING STACO E3 OUST 3.5-10 KVA			
DRAWN BY S.FRALEY		DATE 10/22/24		FIRST USED ON		DO NOT SCALE DWG.	
CHECKER S.A.SMITH		DATE 10/22/24		WEIGHT APPROX.		CAGE CODE 83008	
ENGINEER S.A.SMITH		DATE 10/22/24		SCALE 1/8		SHEET 1 OF 2	
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				A Components Corporation of Amerace Company 2425 Technical Drive Miamiburg, Ohio 45342 USA			
				DWG. NO. 096-6209			



A Components Corporation of America Company
2425 Technical Drive, Marietta, Ohio 45754 USA

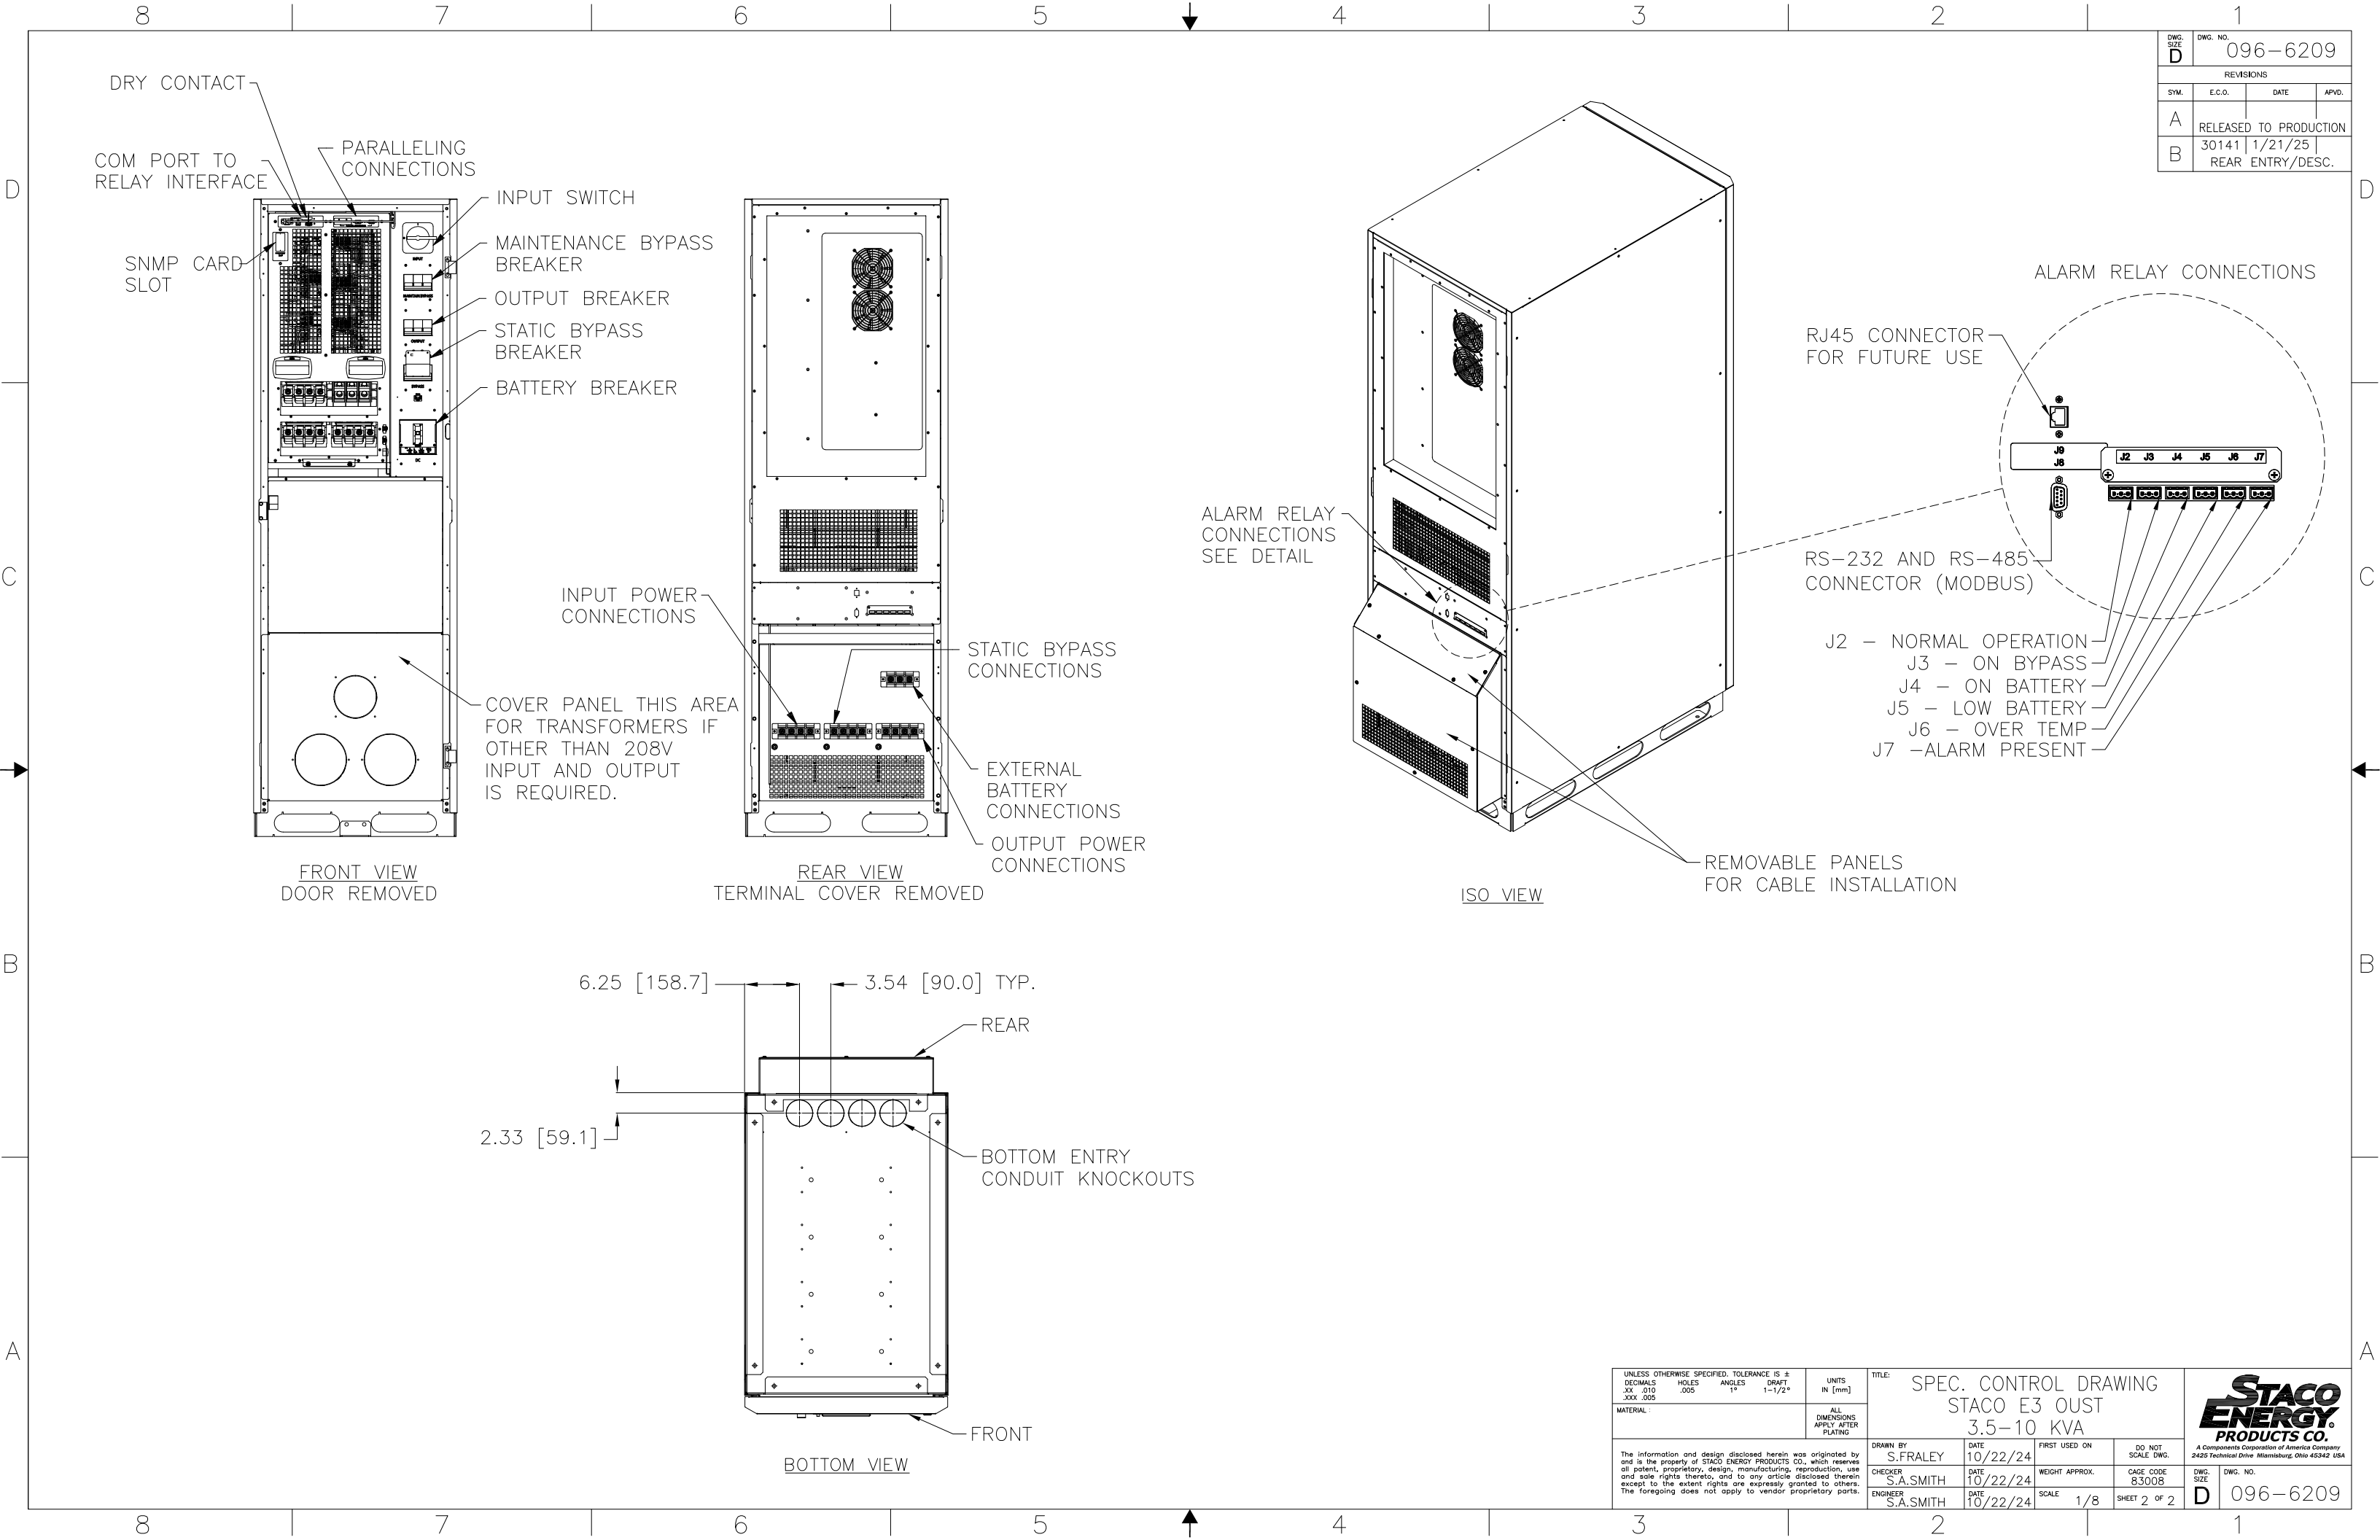

DWG. SIZE	DWG. NO. 096-6209		
	REVISIONS		
SYM.	E.C.O.	DATE	APVD.
A	RELEASED TO PRODUCTION		
B	30141 1/21/25 REAR ENTRY/DESC.		

ALARM RELAY CONNECTIONS

RJ45 CONNECTOR FOR FUTURE USE

RS-232 AND RS-485 CONNECTOR (MODBUS)

- J2 - NORMAL OPERATION
- J3 - ON BYPASS
- J4 - ON BATTERY
- J5 - LOW BATTERY
- J6 - OVER TEMP
- J7 -ALARM PRESENT

REMOVABLE PANELS FOR CABLE INSTALLATION

ALARM RELAY CONNECTIONS SEE DETAIL

ISO VIEW

INPUT POWER CONNECTIONS

STATIC BYPASS CONNECTIONS

EXTERNAL BATTERY CONNECTIONS

OUTPUT POWER CONNECTIONS

COVER PANEL THIS AREA FOR TRANSFORMERS IF OTHER THAN 208V INPUT AND OUTPUT IS REQUIRED.

REAR VIEW
TERMINAL COVER REMOVED

FRONT VIEW
DOOR REMOVED

6.25 [158.7] 3.54 [90.0] TYP.

2.33 [59.1]

REAR

BOTTOM ENTRY CONDUIT KNOCKOUTS

FRONT

BOTTOM VIEW

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX .010 HOLES .005 ANGLES 1° DRAFT 1-1/2°				UNITS IN [mm]		TITLE: SPEC. CONTROL DRAWING STACO E3 OUST 3.5-10 KVA			
MATERIAL:				ALL DIMENSIONS APPLY AFTER PLATING		DRAWN BY S.FRALEY	DATE 10/22/24	FIRST USED ON	DO NOT SCALE DWG.
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.						CHECKER S.A.SMITH	DATE 10/22/24	WEIGHT APPROX.	CAGE CODE 83008
						ENGINEER S.A.SMITH	DATE 10/22/24	SCALE 1/8	SHEET 2 OF 2
						DWG. SIZE D	DWG. NO. 096-6209		



A Components Corporation of America Company
2425 Technical Drive, Marietta, Ohio 45742 USA